

# NSL2.5 Standard Chain Bag

**NAV ID - I0062429**

**CODE - NSL2.5CB20M**

NSL 2.5 Chain Bags are rectangular bags for the NSL2.5 chain hoist for upright or inverted hoist use.

Available in 2 sizes (Standard and XXL BTO), the bags are held by two high resistance polyester straps – protected with an additional leather reinforcement strap – which take the weight of the chain and distribute it over the upper metal frame.

The leather upper flaps increase the resistance of the chain bag and help the chain to slide inside the bag.

- CHAIN BAG CAPACITY = 20 mtr @ 75% with 4.0 X 12.2mm CHAIN
- WITH STEEL FE RAPID MAILLON 6 X 58mm
- WITH LEATHERETTE COVER 2 SIDES

**BELT TECH DATA:**

- Polypropylene 2cm belt
- 25–27% elongation value
- 240 filaments
- 550 kg Minimum Breaking Point
- 175 ° Celsius melting point


**FABRIC TECH DATA:**

- 840 Nylon PVC Coated
- 28–31% elongation value
- Test UNI ISO 13934–1:200
- N 502 medium breaking load value
- Test UNI 4818:1992 p.te 9

**MEASUREMENTS:**

- Opening = 15 x 11cm
- Length = 30cm
- Weight = 0.44 Kg
- SWL = 20Kg - 44lbs

**BAG LABEL:**

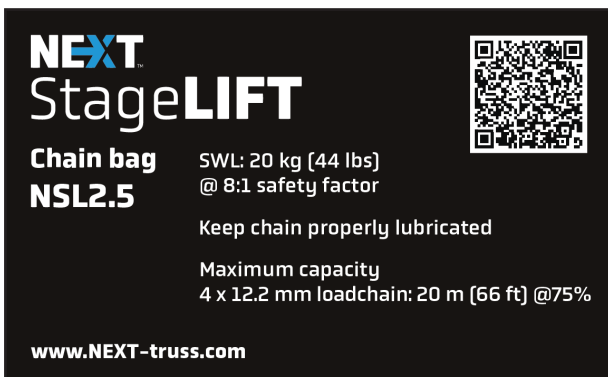

**NEXT StageLIFT**

**Chain bag NSL2.5**

SWL: 20 kg [44 lbs]  
@ 8:1 safety factor

Keep chain properly lubricated

Maximum capacity  
4 x 12.2 mm loadchain: 20 m [66 ft] @75%

[www.NEXT-truss.com](http://www.NEXT-truss.com)

